


MINIMUM 2 X 8 STUDS MINIMUM MINIMUM 5/8" DRYWALL OPENING 1 HOUR FIRE RATING LINE ENTIRE CAVITY (5 SIDES) FIXTURE WHIP w/ CONNECTORS CONNECTION MADE AT JUNCTION BOX 5/8" DRYWALL 1 HOUR FIRE RATING SUBFLOOR JUNCTION BOX ON TOP OR SIDE MIN. 2 x 8 ADJUSTABLE TABS 000000000000000 SURFACE VIEW

INSTALLATION TYPES

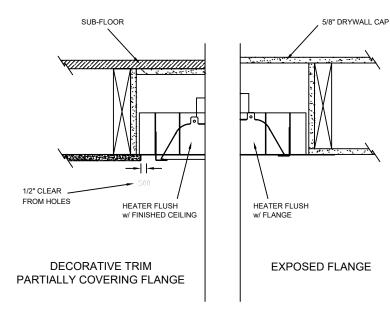



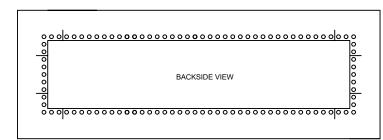

WARNINGS:

- This frame is ONLY to be used on a flat non-sloped ceiling.
- a flat non-sloped ceiling.
 Heater must face straight down.
- Frame and Heater cannot be installed on a pitched angle.

NOTES:

- Heater suspends (Gravity) by resting on adjustable tabs in flush mount fixture.
- Mounting holes on Surface Flange to be determined and drilled by Contractor/Installer.
- Supplied with Hi-Temp Fixture Whip and Hi-Temp Ceramic Wire Nuts.
- **Note:** Please contact factory for longer length whips available for purchase.
- Coil excess flex into heater cavity.
- Use Licensed Electrician ONLY



www.infratech-usa.com

15700 S. Figueroa St. Gardena, California 90248 Phone: (310) 354-1250 Fax: (310) 523-3674

ITEM #: MATERIAL: X-18-2305

304 S.S. #4 FINISH

DESCRIPTION: W-61 FLUSH MOUNT PLASTER FRAME (FOR USE WITH 61¼" HEATERS)

NOTES:

SUPPLIED w/ ELECTRICAL FIXTURE WHIP

DATE: | SCALE: | DRAWN BY: Aug.15, 2017 | N/A | MD